


RADON MEASUREMENTS WITH CR-39 DETECTORS – IMPLICATIONS FOR URANIUM ORE ANALYSIS AND RISK ASSESSMENT

By

Shafi-ur-Rehman

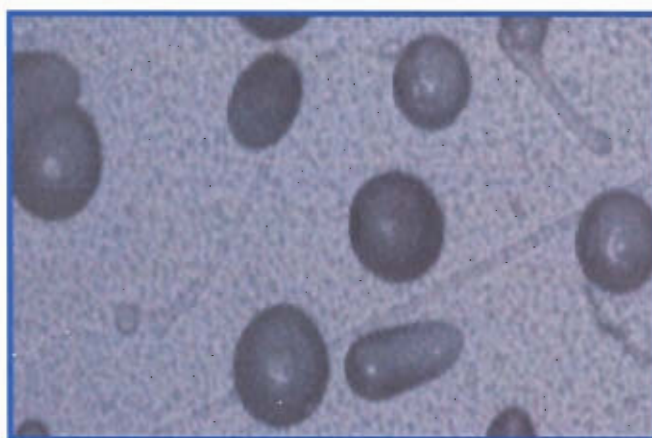

Department of Physics and Applied Mathematics
Pakistan Institute of Engineering and Applied Sciences (PIEAS)
Nilore, Islamabad 45650, Pakistan
November 2005

Department of Physics and Applied Mathematics
Pakistan Institute of Engineering and Applied Sciences (PIEAS)
Nilore, Islamabad 45650, Pakistan

Certificate

Certified that the work presented in this thesis entitled

**“Radon measurements with cr-39 detectors–implications for
uranium ore analysis and risk assessment”**

was carried out by Mr. Shafi-ur-Rehman under my Supervision and that
in my opinion, it is fully adequate, in scope and quality, for the degree of
Doctor of Philosophy.



Dr. Matiullah
Deputy Chief Scientist
PIEAS, P.O. Nilore,
Islamabad.

Submitted through



Dr. Sikander Majeed Mirza
Head Department of Physics &
Applied Mathematics
PIEAS, P.O. Nilore,
Islamabad.

Acknowledgements

All praises are due to Almighty ALLAH, the most beneficent and the most merciful, who gave me the courage to complete this project under the kind supervision of Dr. Matiullah (D.C.S, PIEAS). I would like to thank my supervisor, Dr. Matiullah, for his kind supervision and encouragement during the course of this work.

I am especially grateful to Member Fuel Dr. Khalil Ahmed Qureshi for allowing and sparing me to complete my Ph.D. research work and for providing me sufficient amount of ore for experimental work.

I am also grateful to my respected teacher Professor S.A. Durrani for his encouragement, proper guidance in completing this project and for providing some NRPB dosimeters as well. I am very thankful to Dr. Sikander Majeed Mirza (D.C.S, PIEAS), Dr. Nasir Majeed Mirza (D.C.S, PIEAS) and Dr. Shahid Qamar (Senior Scientist) who's very helping nature and nice behavior motivates the students to improve their knowledge. I am especially thankful to Dr. Aslam Ibraheem (Senior Scientist, PIEAS), Mr. Syed Bilal Ahmad (Senior Scientist) and my colleagues Mr. Shaked ur Rehman (Ph.D. Scholar), Mr. Said Rahman (Ph.D. Scholar), Ms. Munazza Faheem (Ph.D. Scholar) for their help in compilation and improvement of this document. I would also like to thank Mr. M. Jamil (Jr. Executive) for his valuable help in administrative matters and the staff of radiation dosimetry laboratory (M. Asif, Javed Iqbal, M. Yasin, Gulam Mustafa, Ijaz Ahmed Rabbani, Zafarul Haq Zia, M. Yamin, Fazalat and M. Arshad) for their co-operation during the course of my studies.

I also gratefully acknowledge the Higher Education Commission (HEC), Pakistan, for granting me scholarship, the Pakistan Atomic Energy Commission (PAEC) for the grant of study leave and to Rector PIEAS for providing me the opportunity for doing research work at PIEAS.

I am extremely indebted to my beloved parents and my family as without their wishes and moral support I wouldn't have been able to complete this project.



Shafi-ur-Rehman
PIEAS, Nilore, Islamabad
23rd November 2005

Dedicated

To

*My Daughter
Tasneem who is in paradise*

Table of Contents

	Page No.
<i>List of Publications</i>	iv
<i>List of Tables</i>	v
<i>List of Figure Captions</i>	vii
<i>Synopsis</i>	1
Chapter One	AN OVERVIEW OF RADON
	3
1.1	Introduction
	3
1.2	Physical and Chemical Properties of Radon
	4
1.3	Radon daughters
	5
1.4	Dosimetry
	5
1.5	Radon and Risk
	7
1.6	Excess Lung Cancer Risk
	9
1.7	Indoor Radon Sources
	10
1.8	Emanation
	12
1.9	Exhalation
	13
1.10	Mechanism of radon transport
	13
1.11	Radon Measurement Techniques
	16
1.11.1	Active Techniques
	16
1.11.1.1	Lucas Cell (Scintillation Method)
	16
1.11.1.2	Ionization Chamber
	17
1.11.1.3	Surface Barrier Detector (SBD)
	17
1.11.1.4	Two Filter Method
	17
1.11.1.5	Working Level Method
	17
1.11.2	Passive Techniques
	18
1.11.2.1	Thermoluminescent Technique
	18
1.11.2.2	Electrets
	18
1.11.2.3	Charcoal Canister Technique
	18
1.11.2.4	Etched Track Detectors
	19
1.11.2.4.1	Membrane Permeation Samplers
	19
1.11.2.4.2	Plastic Bag Permeation Samplers
	20
1.11.2.4.3	NRPB radon dosimeter
	20
1.12	References
	22
Chapter Two	ETCHED TRACK DETECTORS
	25
2.1	Historical Review
	25
2.2	Advantages of SSNTDs
	26
2.3	CR-39 Polymeric Track Detector
	26
2.4	Formation of the Latent Tracks
	27
2.4.1	Models of Track Formation
	28
2.4.1.1	Thermal-Spike Model
	28
2.4.1.2	Ion-Explosion Spike Model
	29
2.5	Track Formation in Polymers
	30
2.6	Development of Ion Tracks in Polymers
	32
2.6.1	Chemical Etching
	32

2.6.2	<i>Mathematical Details of Track Formation</i>	33
2.6.2.1	<i>Constant Track Etching Velocity, V_T</i>	34
2.6.2.2	<i>Calculation of Major and Minor axes and L_e</i>	36
2.6.2.3	<i>Determination of Track Parameters R & V_T</i>	37
2.7	<i>Etch Pit Profile with Prolonged Etching</i>	38
2.8	<i>Track Counting</i>	40
2.9	<i>References</i>	42
Chapter Three	DISCOVERY OF NEW ETCHANTS	43
3.1	<i>Introduction</i>	43
3.2	<i>Experimental Procedures</i>	44
3.3	<i>Results and discussion</i>	45
3.3.1	<i>NaOH, KOH and LiOH Etchants (Group-IA)</i>	46
3.3.2	<i>Mg(OH)₂, Ca(OH)₂, Ba(OH)₂.8H₂O Solutions and Molten Ba(OH)₂.8H₂O (Group-IIA)</i>	47
3.3.3	<i>NaOH/I-Propanol Etchant</i>	54
3.3.4	<i>NaOH/Ethanol Etchant</i>	61
3.3.5	<i>NaOH/Methanol Etchant</i>	63
3.3.6	<i>SMW (NaOH + Methanol + Water) Etchant</i>	67
3.4	<i>Conclusion</i>	71
3.5	<i>References</i>	72
Chapter four	MEASUREMENT OF RADIOACTIVITY - A CASE STUDY	74
4.1	<i>Introduction</i>	74
4.2	<i>Area under Study</i>	75
4.3	<i>Experimental Procedures</i>	77
4.3.1	<i>Set-up for determination of activity in soil samples</i>	77
4.3.2	<i>Set-up for radon survey in dwellings</i>	78
4.4	<i>Results and Discussion</i>	79
4.4.1	<i>Activity in soil samples</i>	79
4.4.2	<i>Indoor Radon Levels</i>	83
4.5	<i>Conclusion</i>	89
4.6	<i>References</i>	90
Chapter Five	RADON EXHALATION RATE FROM SAND & SOIL – A CASE STUDY	92
5.1	<i>Introduction</i>	92
5.2	<i>Theme of the study</i>	93
5.3	<i>Theory</i>	93
5.4	<i>Experimental procedures</i>	98
5.4.1	<i>Setup for CR-39 Detector</i>	98
5.4.2	<i>Setup for HPGe based Gamma Spectrometry</i>	99
5.5	<i>Results and Discussion</i>	99
5.5.1	<i>²²²Rn exhalation rate and ²²⁶Ra contents using CR-39 detector</i>	99

5.5.2	<i>Determination of ^{226}Ra contents Using HPGe detector</i>	102
5.6	<i>Conclusion</i>	104
5.7	<i>References</i>	105
Chapter Six	<i>ANALYSIS OF URANIUM ORE SAMPLES</i>	106
6.1	<i>Introduction</i>	106
6.2	<i>Theory</i>	107
6.3	<i>Experimental Procedures</i>	108
	6.3.1 <i>Setup for CR-39 Detector</i>	108
	6.3.2 <i>Set-up for HPGe based Gamma spectrometry</i>	110
	6.3.3 <i>Setup for ICP - AES</i>	111
6.4	<i>Results and Discussion</i>	112
	6.4.1 <i>Determination of ^{238}U contents using CR-39 detector</i>	112
	6.4.2 <i>Determination of ^{238}U contents using HPGe detector</i>	113
6.5	<i>Conclusion</i>	117
6.6	<i>References</i>	118
Chapter Seven	<i>CONCLUSION AND DISCUSSION</i>	120
	<i>Future Recommendations</i>	123

List of Papers

1. Matiullah, A. Ahad, **S. Rehman** and M. L. Mirza, 2003. Indoor radon levels and lung cancer risk estimates in seven cities of the Bahawalpure Division, Pakistan. *Radiat. Prot. Dosim.*, 107, 269 – 276.
2. Matiullah, A. Ahad, Shakeel ur Rehman, **Shafi ur Rehman** and M. Faheem, 2004. Measurement of natural radioactivity in the soil of Bahawalpure Division. *Radiat. Prot. Dosim.*, 112, 443 – 447.
3. Matiullah, **S. Rehman**, W. Zaman, 2005. Discovery of new etchants for CR-39 detector. *Radiat. Meas.* 39, 337–343.
4. Matiullah, **S. Rehman**, N. Mati, S. Ahmad, 2005. Some more new etchants for CR-39 detector. *Radiat. Meas.* 39, 551–555.
5. **Shafi-ur-Rehman**, Nadia Imtiaz, Munazza Faheem, Shakeel-ur-Rehman and Matiullah, 2005. Determination of ^{238}U Contents in Ore Samples Using CR-39 Based Radon Dosimeter - Disequilibrium Case. *Radiat. Meas.* (in press)
6. **Shafi-ur-Rehman**, Matiullah and Shakeel-ur-Rehman, 2005. Studying ^{222}Rn exhalation rate from Soil and Sand Samples using CR-39 Detector. *Radiat. Meas.* (in press)
7. Said Rahman, Munazza Faheem, **Shafi-ur-Rehman** and Matiullah, 2005. Radon Awareness Survey in Pakistan. *Radiat. Prot. Dosim.* (in press)
8. **S.Rehman** and Matiullah, 2003. Review of SSNTD Methods for Uranium Exploration. *Sci.Int.(Lahore)*, 15(I),21-25

List of Tables

- Table 1.1: Required data for calculation of Working Level
- Table 2.1: Limits of detectable α -particle energies for some plastic
- Table 3.1: D_{α} , D_{β} , V_B , V_T and η values of CR-39 detectors for the listed concentration of NaOH solution at 70 °C
- Table 3.2: Melting points and solubility values of metallic hydroxides of group-IA and group-IIA (David, 1999)
- Table 3.3: D_{α} , D_{β} , V_B , V_T and η values of CR-39 detectors for the listed concentrations of NaOH/1-Propanol solution at 49 °C
- Table 3.4: D_{α} , D_{β} , V_B , V_T and η values of CR-39 detectors for the listed concentrations of NaOH/Ethanol solution at 55 °C
- Table 3.5: V_B , V_T and etching efficiency of CR-39 detector for 1.5 M NaOH/Methanol at the listed temperatures
- Table 3.6: V_B , V_T and etching efficiency of CR-39 detector for the listed concentrations of Methanol (X %) in SMW solution at 55 °C
- Table 4.1: Details of the cities included in this study
- Table 4.2: Measured mean activity level in the soil of the listed cities of Bahawalpur Division
- Table 4.3: Measured values of Radium equivalent activity, absorbed dose rate, external hazard index and internal hazard Index in the listed cities of the Bahawalpur Division
- Table 4.4: Average indoor radon concentration level (Bq.m^{-3}) in bedrooms of the listed cities of Bahawalpur Division
- Table 4.5: Average indoor radon concentration level (Bq.m^{-3}) in sitting rooms of the listed cities of Bahawalpur Division
- Table 4.6: Estimated excess lung cancer risk in bedrooms of the listed cities of the Bahawalpur Division
- Table 4.7: Estimated excess lung cancer risk in sitting rooms of the listed cities of the Bahawalpur Division
- Table 4.8: Excess lung cancer risk for general population of the listed countries
- Table 5.1: Characteristics of the ore samples used in present study
- Table 5.2: C_{Rn} , C_{Ra} and ^{238}U contents in ore samples assuming secular equilibrium
- Table 5.3: Comparison of ^{238}U contents in ore samples

- Table 5.4: The ^{238}U contents in the sample determined using the measured specific activity of ^{226}Ra
- Table 5.5: ^{238}U contents and its specific activity determined using the measured specific activity of ^{235}U
- Table 5.6: The ^{238}U contents based on the equilibrium corrected specific activity of ^{226}Ra
- Table 5.7: Comparison of ^{238}U contents obtained from three different techniques
- Table 6.1: Minimum and maximum values of ^{222}Rn exhalation rate and radium activity in the soil samples collected from the Bahawalpur Division
- Table 6.2: Minimum and maximum values of ^{222}Rn exhalation rate and radium activity in the soil samples collected from the listed cities of NWFP
- Table 6.3: Minimum and maximum values of ^{222}Rn exhalation rate and radium activity in the sand samples of the Bahawalpur Division
- Table 6.4: Minimum and maximum values of ^{222}Rn exhalation rate and radium activity in the sand samples collected from the listed cities of NWFP
- Table 6.5: Measured average ^{226}Ra activity in the soil samples collected from the listed towns of the Bahawalpur Division
- Table 6.6: Measured average ^{226}Ra activity in the sand samples collected from the listed towns of the Bahawalpur Division
- Table 6.7: Measured average ^{226}Ra activity in the soil samples collected from the listed cities of NWFP
- Table 6.8: Measured average ^{226}Ra activity in the sand samples collected from the listed cities of NWFP

List of Figures

- Figure 1.1: Excess lung cancer risk as a function of indoor radon level.
- Figure 1.2: Sketch of emanation processes in dependence on location of ^{222}Ra atoms and soil moisture contents.
- Figure 1.3: Diffusive and advective transport of radon.
- Figure 1.4: Radon monitoring devices based on etched track detectors (a) filter permeation sampler (b) Plastic bag permeation sampler (c) NRPB radon dosimeter.
- Figure 1.5: Schematic representation of the main processes involved in radon detection and evaluation by an etched track radon dosimeter.
- Figure 2.1: The ion explosion spike mechanism for track formation in inorganic solids: The original ionization left by the passage of a charged particle (a) is unstable and ejects ions in to the solid, creating vacancies and interstitials (b). Later, the stressed region relaxes elastically (c) Straining the undamaged matrix (after Fleischer et al. 1975).
- Figure 2.2: Schematic diagram of chain scission in polymers caused by the passage of heavily charged-particles.
- Figure 2.3: Some parameters used to describe the geometry of the etched tracks.
- Figure 2.4: Construction for the calculation of etched-track parameters for a track of constant V_T , lying normally to the detector surface. The semi-cone-angle is denoted by δ (= critical angle, θ_c); the other parameters are as explained in the caption to Fig. 2.3.
- Figure 2.5: Construction for the calculation of the major axis of elliptical track-opening and related etched track parameters. The track shown has a constant V_T and lies at an angle $\theta = 45^\circ$ to the detector surface.
- Figure 2.6: The evolution of an etch pit profile with prolonged etching. The track shown has $V (= V_T/V_B) = 2$, and makes a dip angle $\theta = 70^\circ$ with the detector surface O. The track profile goes through three phases: conical, transition, and spherical, as the etching proceeds.
- Figure 2.7: Tracks Revealed on CR-39 exposed to radon in a closed chamber and etched in 6 M NaOH at 80 °C for 16 h.
- Figure 3.1: Etching efficiency of CR-39 detector as a function of temperature of 6 M NaOH solution.

- Figure 3.2: (a) Etching efficiency as a function of temperature for 6 M KOH (b) Etching efficiency as a function of concentration for KOH at 70 °C.
- Figure 3.3: (a) Etching efficiency as a function of temperature for 5 M LiOH (b) Etching efficiency as a function of concentration for LiOH at 70 °C.
- Figure 3.4: Etching efficiency of CR-39 as a function of concentration of the Ba(OH)₂·8H₂O solution at 78 °C.
- Figure 3.5: Etching efficiency of CR-39 as a function of temperature of the molten Ba(OH)₂·8H₂O solution.
- Figure 3.6: Average track diameter of fission fragments as a function of etching time. Here CR-39 detectors were etched in 1 M NaOH/1-Propanol at the listed temperatures.
- Figure 3.7: Average track diameter of alpha particles as a function of etching time. Here CR-39 detectors were etched in 1 M NaOH/1-Propanol at the listed temperatures.
- Figure 3.8: Etching efficiency of CR-39 detector as a function of temperature for 1 M NaOH/1-Propanol etchant.
- Figure 3.9: Average track diameter of fission fragments as a function of etching time. Here CR-39 detectors were etched at 49 °C in NaOH/1-Propanol at the listed etchant concentrations.
- Figure 3.10: Average track diameter of alpha particles as a function of etching time. Here CR-39 detectors were etched at 49 °C in NaOH/1-Propanol at the listed etchant concentrations.
- Figure 3.11: Etching efficiency of CR-39 detector as a function of concentration of NaOH/1-Propanol etchant at 49 °C.
- Figure 3.12: (a) Etching efficiency of CR-39 as a function of temperature for 1.5 M NaOH/Ethanol; (b) Etching efficiency as a function of concentration for NaOH/Ethanol at 55 °C.
- Figure 3.13: Average fission fragment track diameter as a function of etching time. Here CR-39 detectors were etched in 1.5 M NaOH/Methanol at the listed temperatures.
- Figure 3.14: Average alpha particle track diameter as a function of etching time. Here CR-39 detectors were etched in 1.5 M NaOH/Methanol at the listed temperatures.

- Figure 3.15: (a) Etching efficiency of CR-39 as a function of temperature for 1.5 M NaOH/Methanol; (b) Etching efficiency of CR-39 as a function of concentrations of NaOH/Methanol at 55 °C.
- Figure 3.16: Average alpha particle track diameter as a function of Methanol concentrations (X %) in SMW solution at 55 °C.
- Figure 3.17: Average fission fragment track diameter as a function of Methanol concentrations (X %) in SMW solution at 55 °C.
- Figure 3.18: Etching efficiency of CR-39 detector as a function of Methanol Concentration (X %) in SMW solution.
- Figure 4.1: Map of Pakistan showing the cities in Bahawalpur Division selected for soil activity measurements and indoor radon survey.
- Figure 5.1: Experimental setup for ore analysis using CR-39 detector.